


Manual X-Lite 3.0 untuk Windows



Menambah User Account di Server Briker IPPBX

Buka web browser seperti Mozilla Firefox, Internet Explorer, atau web browser lainnya. Ketik alamat *IP Address Server Briker IPPBX* seperti contoh di bawah.

Pada manual ini tidak menjelaskan bagai mana cara instalasi *Server Briker IPPBX* untuk lebih jelas informasi mengenai cara instalasi bisa di baca <http://www.briker.org/>




- Setelah itu akan muncul autentikasi, masukan *Username* dan *Password*

Keterangan

Username : **administrator**

Password : **Briker**

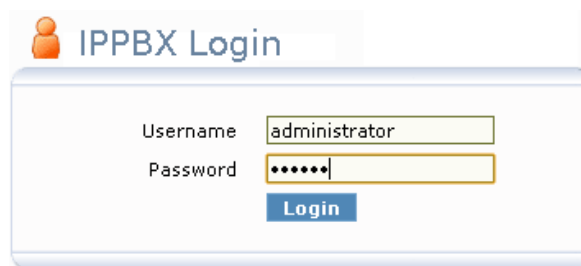

- Setelah berhasil *Login* maka tampil halaman seperti di bawah.



- Untuk menambahkan *user account* pilih menu **IPPBX Administration**

Briker 1.0.2 "OWP"

Home | **IPPBX Administration** | Billing Administration | Operator Panel

- Tampilan halaman **IPPBX Administration**, pilih **Extensions** Untuk menambahkan *user account*.

Setup Tools

Admin

IPPBX Status

Basic

Custom Contexts

Extensions

Feature Codes

General Settings

Outbound Routes

Trunks

Inbound Call Control

Inbound Routes

Zap Channel DIDs

Announcements

Blacklist

CallerID Lookup Sources

Day/Night Control

Follow Me

IVR

Queues

Ring Groups

Time Conditions

Internal Options & Configuration

Conferences

DISA

Misc Applications

Misc Destinations

Music on Hold

PIN Sets

Paging and Intercom

Parking Lot

System Recordings

IPPBX Status

IPPBX Notices

No new notifications
show all

IPPBX Statistics

Total active calls	0
Internal calls	0
External calls	0
Total active channels	0

IPPBX Connections

IP Phones Online	1
IP Trunks Online	3
IP Trunk Registrations	2

Uptime

System Uptime: 22 hours, 54 minutes
Asterisk Uptime: 22 hours, 8 minutes
Last Reload: 0 minutes

System Statistics

Processor

Load Average	0.12
CPU	0%

Memory

Mem	12%
Swap	0%

Disks

/	92%
/var/run	0%
/var/lock	0%
/dev	0%
/dev/shm	0%
/lib/modules/2.6.24-16-...	8%

Networks

eth0 receive	0.42 KB/s
eth0 transmit	1.33 KB/s

Server Status

Asterisk	OK
MySQL	OK
Web Server	OK
SSH Server	OK

- Tampilan *Extensions*

Klik *Add Extensions*

Pilih Device: *Generic SIP Device*

Klik *Submit*

Setup Tools

Admin

IPPBX Status

Basic

Custom Contexts

Extensions

Feature Codes

General Settings

Outbound Routes

Trunks

Inbound Call Control

Inbound Routes

Zap Channel DIDs

Announcements

Blacklist

CallerID Lookup Sources

Day/Night Control

Follow Me

IVR

Queues

Ring Groups

Time Conditions

Internal Options & Configuration

Conferences

DISA

Misc Applications

Misc Destinations

Music on Hold

PIN Sets

Paging and Intercom

Parking Lot

System Recordings

Add an Extension

Please select your Device below then click Submit

Device

Device

- Tampilan halaman, *Add SIP Extensions* isi seperti contoh dibawah.

User Extensions : **8013**
Display Name : **Dadan Hatomi**
Secret : **123456**
Untuk yang lainnya biarkan default
klik *Submit*

- Setup Tools
- Admin
- IPPBX Status
- Basic
- Custom Contexts
- Extensions
- Feature Codes
- General Settings
- Outbound Routes
- Trunks
- Inbound Call Control
- Inbound Routes
- Zap Channel DIDs
- Announcements
- Blacklist
- CallerID Lookup Sources
- Day/Night Control
- Follow Me
- IVR
- Queues
- Ring Groups
- Time Conditions
- Internal Options & Configuration
- Conferences
- DISA
- Misc Applications
- Misc Destinations
- Music on Hold
- PIN Sets
- Paging and Intercom
- Parking Lot
- System Recordings

Add SIP Extension

Add Extension
Phone 1 <8011>
Phone 2 <8012>

Add Extension

User Extension
Display Name
CID Num Alias
SIP Alias

Extension Options

Direct DID
DID Alert Info
Music on Hold
Outbound CID
Ring Time
Call Waiting
Emergency CID

Device Options

This device uses sip technology.
secret
dtmfmode

Fax Handling

Fax Extension
Fax Email
Fax Detection Type
Pause after answer

Privacy

Privacy Manager

Recording Options

Record Incoming
Record Outgoing


Voicemail & Directory

Status
Voicemail Password
Email Address
Pager Email Address
Email Attachment yes no
Play CID yes no
Play Envelope yes no
Delete Vmail yes no
VM Options
VM Context
VmX Locater™


- Klik *Apply Configuration Changes* untuk menerapkan semua hasil konfigurasi



- Klik *Continue with reload*

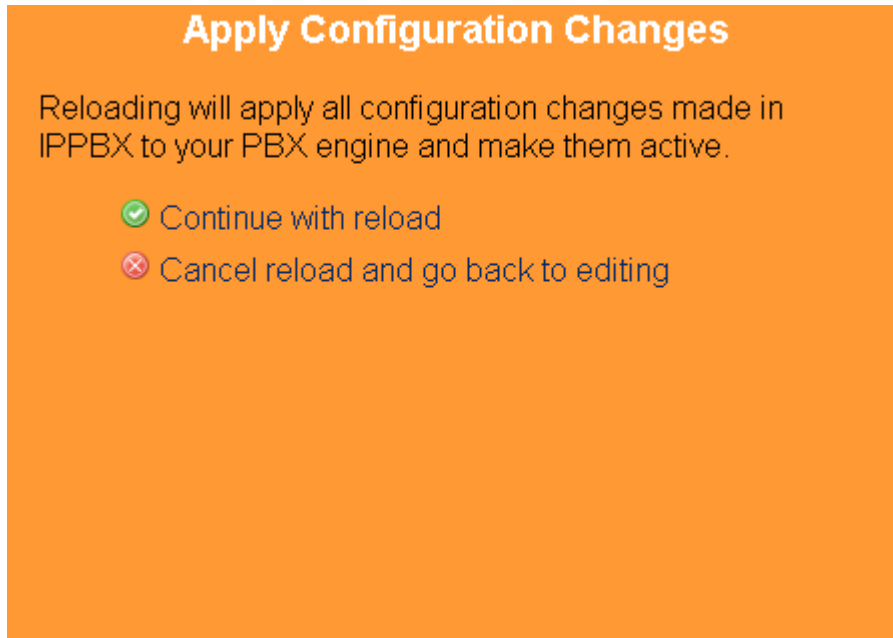

- Tampilan halaman *Extensions* setelah di tambahkan *User Account*

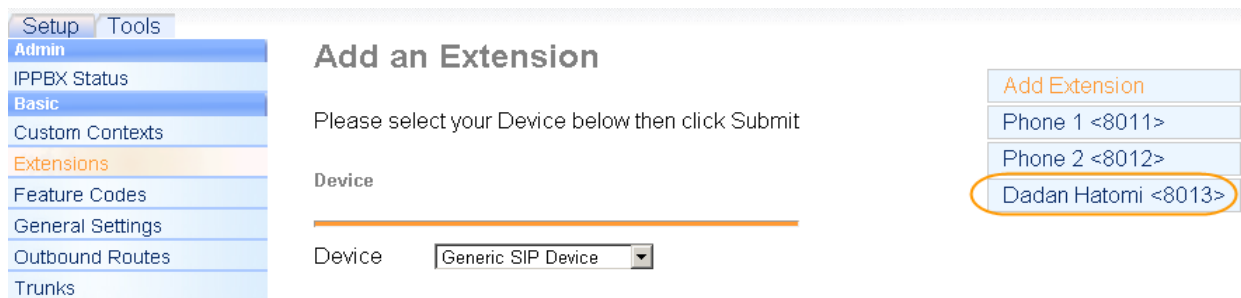

Download X-Lite 3.0

Buka web browser seperti Mozilla Firefox, Internet Explorer, atau web browser lainnya. Ketik alamat <http://www.counterpath.com/X-Lite-Download.html>



Maka akan tampil halaman seperti di bawah ini, klik Download X-Lite sesuai Sistem Operasi yang anda gunakan.

X-Lite Download

Choose which product you would like to download: X-Lite or X-Lite Demo.

X-Lite

X-Lite is a fully functioning softphone featuring many of the popular features of eyeBeam. With your existing connection to a VoIP or broadband service or an IP-PBX (e.g. Asterisk, enterprise LAN), it allows you to make calls to any softphone, mobile or landline number.

A subscription with a VoIP service provider or your ISP is required. Please contact the VoIP service provider of your choice to subscribe.

- Download X-Lite 3.0 for Windows
- Download X-Lite 3.0 for Mac
- Download X-Lite 2.0 for Linux


X-Lite Demo - NOW AVAILABLE!

X-Lite Demo is a demo VoIP service designed to allow you to test the software without being connected to a VoIP service provider or IP-PBX. If you do not currently have a VoIP service connection, download X-Lite Demo. You will be able to call other X-Lite Demo users.


- Download X-Lite 3.0 DEMO for Windows
- Download X-Lite 3.0 DEMO for Mac

Install X-Lite 3.0

- Klik X-Lite 3.0 yang sudah di download.




Maka akan muncul seperti gambar di bawah ini, klik *Next* untuk melanjutkan proses instalasi.

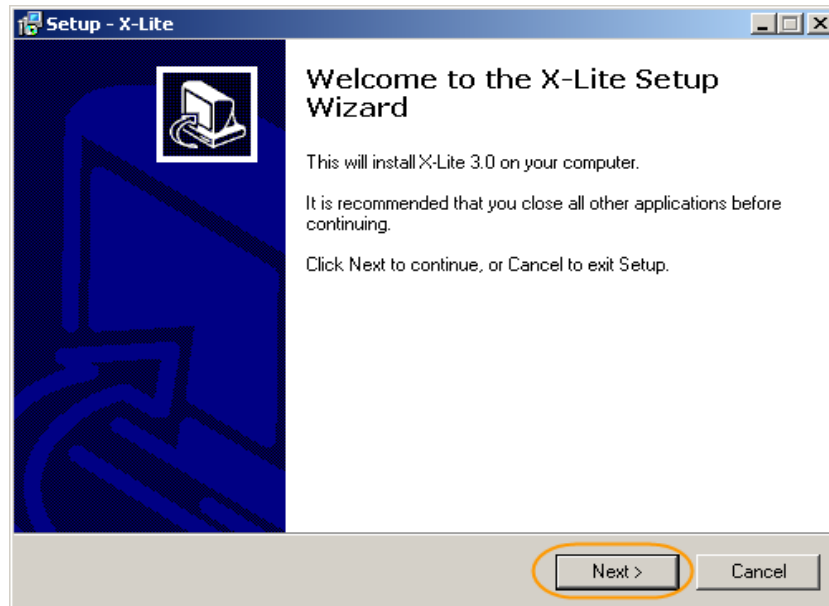


- Pilih *I accept the agreement*, untuk menyetujui proses instalasi.
- Klik *Next* untuk melanjutkan proses instalasi.




- Pilih letak folder X-Lite 3.0 akan di install, klik **Browse..** untuk memilih letak folder
- Klik **Next**, unruk melanjutkan proses instalasi

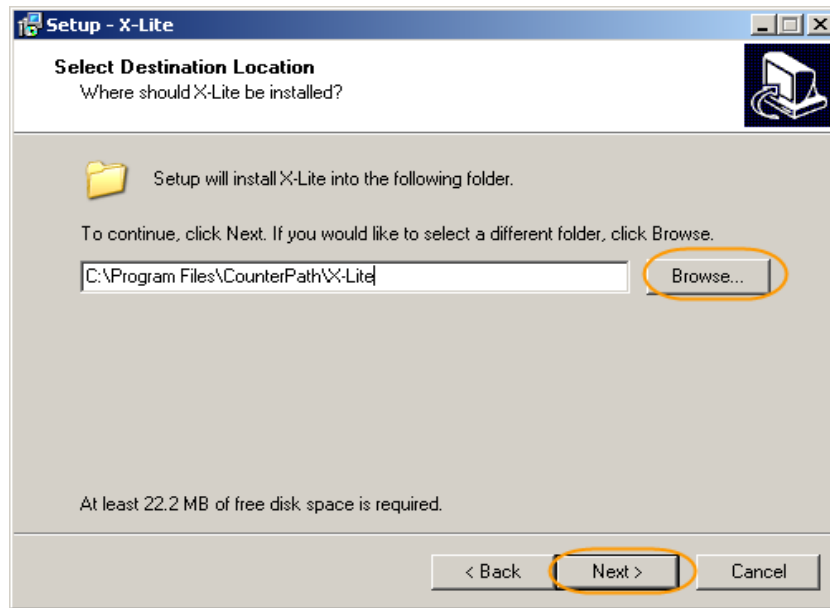

- Klik **Next**, untuk melanjutkan proses instalasi

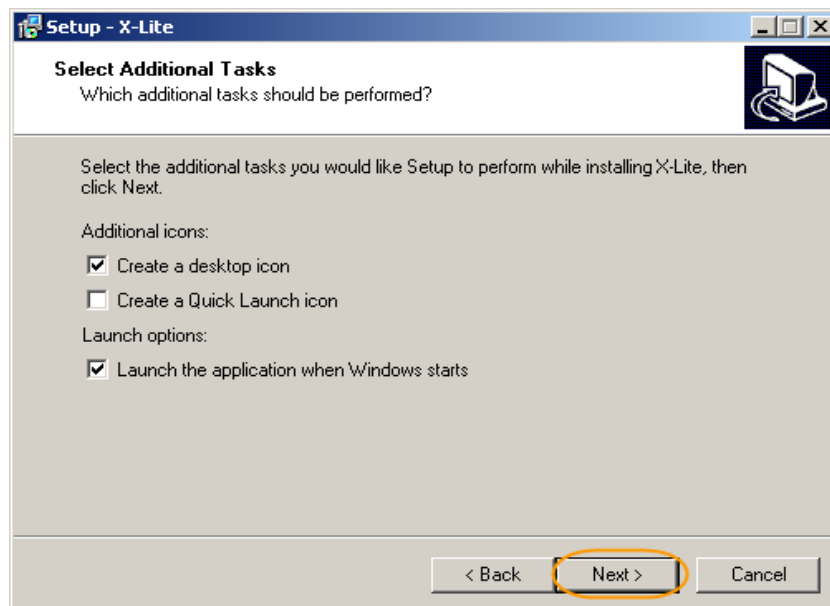

- Tunggu proses instalasi sampai beres, dan muncul tombol **Finish** seperti gambar di bawah ini

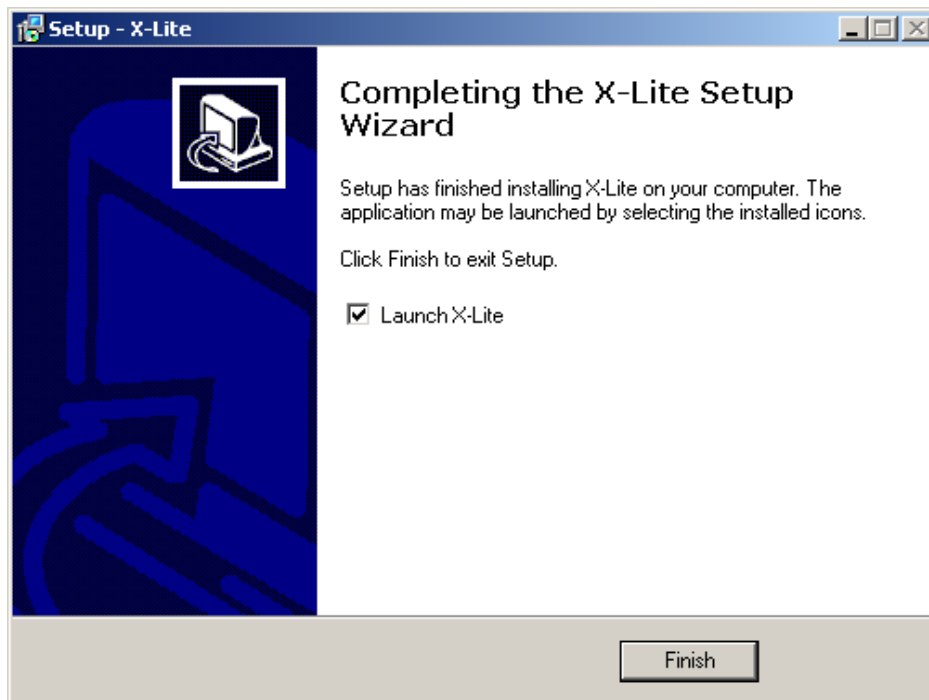

- Tampilan X-Lite Setelah Instalasi beres




Setting SIP Account

- Klik tombol segi tiga kebawah, pilih *SIP Account Setting...* untuk memasukan user account



- Klik *Add...* untuk menambah user account dan password

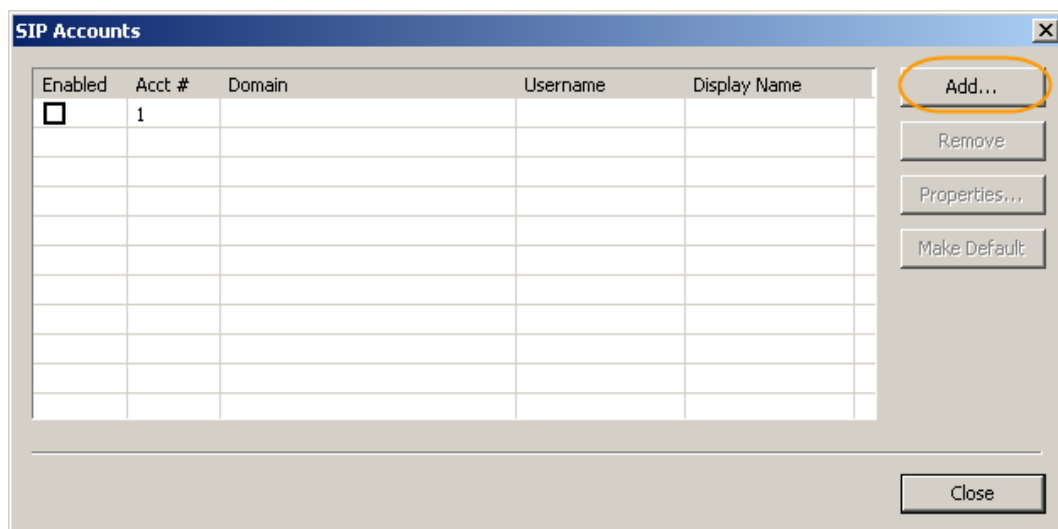

- Isi *Account* seperti contoh di bawah ini

Display Name : Dadan Hatomi

User Name : 8013

Password : 123456

Domain : 119.18.159.123

- Klik *OK*

Properties of Account 1

Account | Voicemail | Topology | Presence | Advanced

User Details

Display Name: Dadan Hatomi

User name: 8013

Password:

Authorization user name:

Domain: 119.18.159.123

Domain Proxy

Register with domain and receive incoming calls

Send outbound via:

domain

proxy Address:

Dialing plan: #1\a\a.T;match=1;prestrip=2;

OK Cancel Apply

- klik tombol *Close*

SIP Accounts

Enabled	Acct #	Domain	Username	Display Name
<input checked="" type="checkbox"/>	1	119.18.159.123 (default)	8013	Dadan Hatomi
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>				
<input type="checkbox"/>				

Add... Remove Properties... Make Default

Close

- Tampilan setelah *SIP Account* di konfigurasi



- Tampilan Register SIP Account telah berhasil register



Sponsorships



Website: <http://www.mediainfo.co.id>



Website: <http://www.imn-global.com>